


LINE TRACK

PROFILES



	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>85
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>85
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>85
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>85
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>85
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>85
				4.000K	9.997	

TEC.DRAWINGS

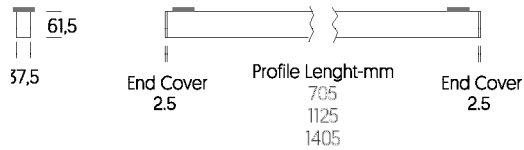

Luminarias compatibles con los siguientes carriles: / The luminaires are compatible with the following rails:
 NA Globaltrac PRO, Concord, Eutrack 25101, Hoffmeister, IG STD 677, Ivela, Stucchi and Unipro T3.

DETAIL PHOTO



LED	⊕	230V	IP20	L 60.000h L80	McAdam C3
≈ 14W > 2.000lm	LNET A 07	•	•	9	• •
≈ 22W > 3.000lm	LNET A 11	•	•	9	• •
≈ 28W > 4.000lm	LNET A 14	•	•	9	• •
≈ 36W > 6.000lm	LNET A 18	•	•	9	• •
≈ 45W > 7.000lm	LNET A 22	•	•	9	• •
≈ 56W > 9.000lm	LNET A 28	•	•	9	• •

BASIC OPTIONS

NO DIM	N	No Dimmable				A WS
3K	3	3000K				A BS
9	9	120°				
A	A	Ice Difusser				
WS	WS	Satin White	LNET	A	••	N 3 9
BS	BS	Satin Black	LNET	A	••	N 3 9

CUSTOMIZE OPTIONS

LED CONTROL						
DALI	D	Dimmable Dali	LNET	A	••	D • 9
						C ••
LED COLOR TEMPERATURE						
4K	4	4000K	LNET	A	••	• 4 9
LED COMPLEMENTS						
C	C	MicroPrismatic Dif.	LNET	A	••	• • 9