


BELL PROFILES



| | W | mm | mA | TEMP | LUM | CRI |
|-----------|------|-------|-----|--------|-------|-----|
| BELL C 05 | 4.9 | 308 | | 3.000K | 745 | |
| | | | | 4.000K | 815 | |
| BELL C 15 | 14.8 | 868 | 350 | 3.000K | 2.240 | >85 |
| | | | | 4.000K | 2.445 | |
| BELL C 25 | 24.7 | 1.428 | | 3.000K | 3.735 | |
| | | | | 4.000K | 4.075 | |



TEC.DRAWINGS

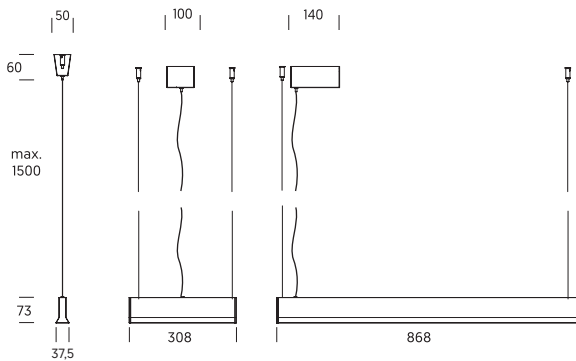

| LED | 230V | IP20 INT | 60.000h L80 | McAdam C3 |
|-------|-----------|-----------------------------|-------------|-----------|
| ≈ 5W | > 700lm | BELC A 05 N • 9 A .. | | |
| ≈ 15W | > 2.200lm | BELC A 15 N • 9 A .. | | |
| ≈ 25W | > 3.700lm | BELC A 25 N • 9 A .. | | |

BASIC OPTIONS

| | | | | | | | | | | |
|---------------|-----------|--------------|------|---|-----------|----------|----------|----------|----------|-----------|
| NO DIM | N | No Dimmable | | | | | | | | |
| 3K | 3 | 3000K | | | | | | | | |
| 9 | 9 | 120° | | | | | | | | |
| A | A | Ice Difusser | | | | | | | | |
| WS | WS | Satin White | BELC | A | 25 | N | 3 | 9 | A | WS |
| BS | BS | Satin Black | BELC | A | 25 | N | 3 | 9 | A | BS |

CUSTOMIZE OPTIONS

| LED COLOR TEMPERATURE | |
|-----------------------|----------------|
| 4K | 4 4000K |

BELC A .. N 4 9 A ..

ACCESSORIES

