

LINE TRACK


PROFILES



	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	726	250	3.000K	2.325	>85
				4.000K	2.499	
LINE_11	22	1.146	250	3.000K	3.720	>85
				4.000K	3.999	
LINE_14	28	1.426	250	3.000K	4.650	>85
				4.000K	4.998	




TEC.DRAWINGS

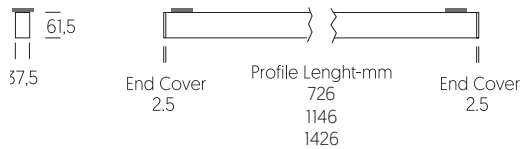

Luminarias compatibles con los siguientes carriles: / The luminaires are compatible with the following rails:
 NA Globaltrac PRO, Concord, Eutrack 25101, Hoffmeister, IG STD 677, Ivela, Stucchi and Unipro T3.

DETAIL PHOTO

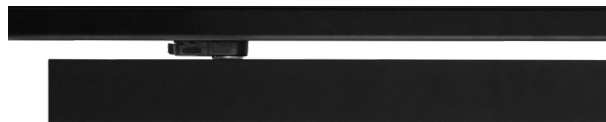

LED	230V	IP20	60.000h L80	McAdam C3
≈ 14W > 2.000lm	LNET	A	07	• • 9 • •
≈ 22W > 3.000lm	LNET	A	11	• • 9 • •
≈ 28W > 4.000lm	LNET	A	14	• • 9 • •

BASIC OPTIONS

NO DIM	N	No Dimmable							
3K	3	3000K							
9	9	120°							
A	A	Ice Difusser							
WS	WS	Satin White	LNET	A	••	N	3	9	A WS
BS	BS	Satin Black	LNET	A	••	N	3	9	A BS

CUSTOMIZE OPTIONS

LED CONTROL									
DALI	D	Dimmable Dali	LNET	A	••	D	•	9	• •
LED COLOR TEMPERATURE									
4K	4	4000K	LNET	A	••	•	4	9	• •
LED COMPLEMENTS									
C	C	MicroPrismatic Dif.	LNET	A	••	•	•	9	C ••