

CARDAN 90



CARDANS



	W	mA	TEMP	LUM	CRI
12W	11.8	350	2.700K	1.675	>82
			3.000K	1.870	>85
			4.000K	1.940	>85
18W	17.3	500	2.700K	2.455	>82
			3.000K	2.640	>85
			4.000K	2.730	>85
25W	25	700	2.700K	3.260	>82
			3.000K	3.505	>85
			4.000K	3.625	>85



TEC.DRAWINGS

CARDAN 90-1




137x137

CARDAN 90-2



259x137

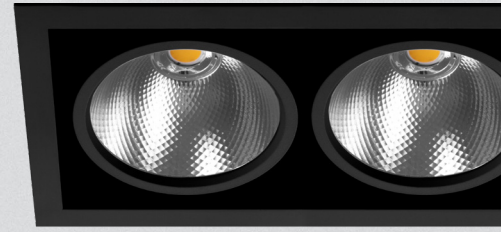

LED	230V	IP23 EXT	50°	350°	50.000h L90/B10	McAdam C2
Cardan 90.1	≈ 11W	> 1600lm	CR91	A 10	• • • • • • • •	• • • • • • • •
	≈ 17W	> 2400lm	CR91	A 20	• • • • • • • •	• • • • • • • •
	≈ 25W	> 3200lm	CR91	A 30	• • • • • • • •	• • • • • • • •
Cardan 90.2	≈ 22W	> 2x1600lm	CR92	A 10	• • • • • • • •	• • • • • • • •
	≈ 34W	> 2x2400lm	CR92	A 20	• • • • • • • •	• • • • • • • •
	≈ 50W	> 2x3200lm	CR92	A 30	• • • • • • • •	• • • • • • • •

BASIC OPTIONS

NO DIM	N	No Dimmable								
3K	3	3000K								
34°	3	34°								
B	B	Clear Difusser								
WB	WB	Satin White/Black	CR91	A	• •	N	3	3	B	WB
			CR92	A	• •	N	3	3	B	WB
BS	BS	Satin Black	CR91	A	• •	N	3	3	B	BS
			CR92	A	• •	N	3	3	B	BS

CUSTOMIZE OPTIONS

LED CONTROL

PUSH	F	Dimmable Push	CR9-	A	• •	F	• • • • • •
DALI	D	Dimmable Dali	CR9-	A	• •	D	• • • • • •

LED COLOR TEMPERATURE

2.7K	2	2700K	CR9-	A	• •	2	• • • • • •
4K	4	4000K	CR9-	A	• •	4	• • • • • •

LED BEAM ANGLE

14°	2	14°	CR9-	A	• •	• •	2	• • • • • •
50°	5	50°	CR9-	A	• •	• •	5	• • • • • •

LED COMPLEMENTS

A	A	Ice Difusser	CR9-	A	• •	• •	A	• •
----------	----------	--------------	------	---	-----	-----	----------	-----