


CLICK DOT

LINEAR SYSTEMS


IP20



CLICK DOT 5P

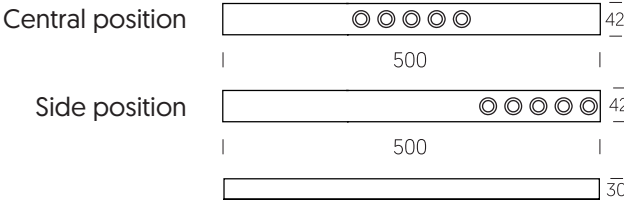

CLICK DOT 10P

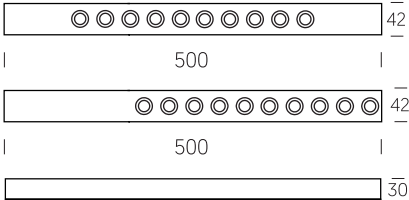

850°

CLICK DOT

LED		230V	5P / ≈ 10W		> 1.000lm	KDTX A 05	•	•	•	A	..
			10P / ≈ 20W		> 2.000lm	KDTX A 10	•	•	•	A	..

Modelo	W	mA	TEMP	LUM	CRI
Click Dot 5	10	700	3.000°K	1.079	>90
	10	700	4.000°K	1.155	>90
Click Dot 10	20	700	3.000°K	2.158	>90
	20	700	4.000°K	2.310	>90

LED CONTROL

	N	No Dimmable	KDTX A .. N • • • ..
	D	Dimmable Dali / Push	KDTX A .. D • • • ..

LED COLOUR TEMPERATURE

	3	3000° K	KDTX A .. • 3 • • ..
	4	4000° K	KDTX A .. • 4 • • ..

LED BEAM ANGLE

	1	Narrow Spot	KDTX A .. • • 1 • ..
	3	Medium	KDTX A .. • • 3 • ..

DOT POSITION

	C	Central Position	KDTX A .. • • • C ..
	S	Side Position	KDTX A .. • • • S ..

COLOURS

	WS	Satin White *Textured finished	KDTX A .. • • • • WS
	BS	Satin Black *Textured finished	KDT A .. • • • • BS