



CORE RECESSEDS



	W	mA	TEMP	LUM	CRI
6W	6,2	350	2.700K	570	>90
			3.000K	595	
			4.000K	635	
10W	10,4	300	2.700K	1.005	>95
			3.000K	1.070	
			4.000K	1.135	

GU 10 **230V** **MAX 50W** **IP20 EXT** **40°**
CORE E 50 X X X X X **WS**
CORE E 50 X X X X X **BS**

LED **230V** **IP33 EXT** **IP20 INT** **28°** **50.000h L90/B10** **McAdam C2**
 ≈ 6W > 600lm **CORE A 06 . . 4 . .**
 ≈ 10W > 1000lm **CORE A 10**

BASIC OPTIONS

	N	No Dimmable							
	3	3000K							
	4	40°							
	X	No Difusser							
	WS	Satin White	CORE A	..	N	3	4	X	WS
	BS	Satin Black	CORE A	..	N	3	4	X	BS

CUSTOMIZE OPTIONS

LED CONTROL

	F	Dimmable Push	CORE A	..	F
	D	Dimmable Dali	CORE A	..	D


LED COLOR TEMPERATURE

	2	2700K	CORE A	..	.	2
	4	4000K	CORE A	..	.	4

LED BEAM ANGLE

	1	16°	CORE A	10	.	.	1	.	..
	2	24°	CORE A	10	.	.	2	.	..

TEC.DRAWINGS

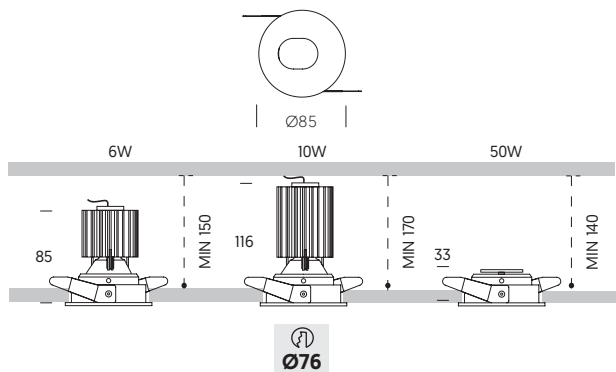

Wifi or Bluetooth version and other colors, please consult it.