



SUPER
SURFACE

Super is a surface mounted downlight with cylindrical design, available in black and white finishes. It offers three color temperature options (2700K, 3000K and 4000K) to suit different environments. Designed with high-efficiency LED technology, it features an optimized diffuser for uniform and comfortable light distribution.

Qualities

LED

230V

IP20

30.000h

McAdam C3

Led Colour

2.7K

3K

4K

Regulation

NO
DIM

Beam Angle


80°

Finish

Diffuser

Installation

TEC. DRAWINGS

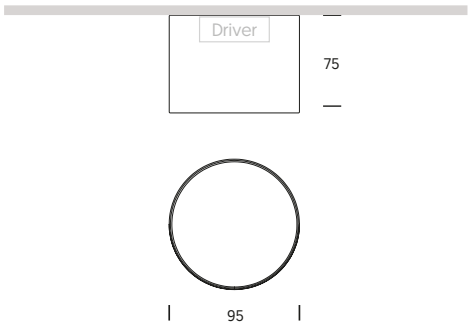

| | W | mA | TEMP | LUM | CRI |
|-------|-----|-----|--------|------|-----|
| SUPER | 15W | 350 | 2.700K | 935 | >90 |
| | | | 3.000K | 982 | |
| | | | 4.000K | 1040 | |

REF. CODE

CODE BASE

Technology

Power

LED Control

LED Colour

Beam angle

Diffuser

Finishes

SUPR + A Led + 15 15W + N NoDim + 2 2700K + 3 3000K + 4 4000K + 8 80° + A Ice + BS Black WS White

