

# FOCUS 95 TRACK

## PROJECTORS




	W	mA	TEMP	LUM	CRI
	23.8	700	2.700K	3.595	>82
<b>FOCUS 95</b>	23.8	700	3.000K	3.870	>85
	23.8	700	4.000K	4.000	>85



LED □ 230V IP20 90° 350°  
 ≈24W > 3.500lm **FCT9 A 95** . . . . .

### TEC.DRAWINGS

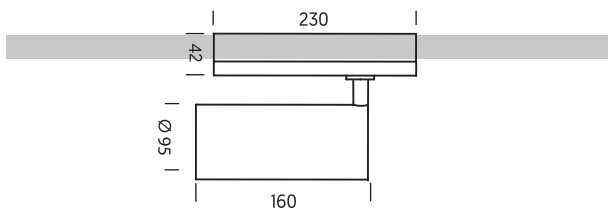

### Carriles compatibles / Compatible rails

Luminarias compatibles con los siguientes carriles: / The luminaires are compatible with the following rails:  
 NA Globaltrac PRO, Concord, Eutrack 25101, Hoffmeister, IG STD 677, Ivela, Stucchi and Unipro T3.


### BASIC OPTIONS

	<b>N</b>	No Dimmable								
	<b>3</b>	3000K								
	<b>2</b>	16°								
	<b>B</b>	Clear Difusser								
	<b>WB</b>	White Black	FCT9	A	<b>95</b>	<b>N</b>	<b>3</b>	<b>2</b>	<b>B</b>	<b>WB</b>
	<b>BS</b>	Satin Black	FCT9	A	<b>95</b>	<b>N</b>	<b>3</b>	<b>2</b>	<b>B</b>	<b>BS</b>

### CUSTOMIZE OPTIONS

<b>LED CONTROL</b>										
	<b>D</b>	Dimmable Dali	FCT9	A	95	<b>D</b>	.	.	.	..
<b>LED COLOR TEMPERATURE</b>										
	<b>2</b>	2700K	FCT9	A	95	.	<b>2</b>	.	.	..
	<b>4</b>	4000K	FCT9	A	95	.	<b>4</b>	.	.	..
<b>LED BEAM ANGLE</b>										
	<b>3</b>	38°	FCT9	A	95	.	.	<b>3</b>	.	..
	<b>6</b>	60°	FCT9	A	95	.	.	<b>6</b>	.	..
<b>LED COMPLEMENTS</b>										
	<b>P</b>	Cross	FCT9	A	95	.	.	.	<b>P</b>	..
	<b>H</b>	Honeycomb	FCT9	A	95	.	.	.	<b>H</b>	..
<b>COLOURS</b>										
	<b>PB</b>	Polished & Black	FCT9	A	95	.	.	.	.	<b>PB</b>
	<b>CB</b>	Copper & Black	FCT9	A	95	.	.	.	.	<b>CB</b>

### COMPLEMENTS

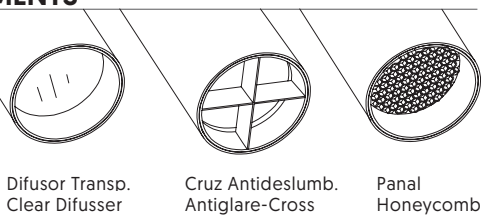

Difusor Transp.  
Clear Difusser

Cruz Antideslumb.  
Antiglare-Cross

Panal  
Honeycomb