

# CLICK PROFILE RF

## LINEAR SYSTEMS



Perfil rehundido de extrusión de aluminio, en acabado texturizado en blanco y negro, version para no-dim y dimmable. Instalación Frameless

Aluminum extruded recessed profile, in black and white textured finish, version for non-dim and dimmable. Pendant, frameless and surface version.

LED 230V

1.000mm	KPRF	X	10	•	X	X	X	••
1.500mm	KPRF	X	15	•	X	X	X	••
2.000mm	KPRF	X	20	•	X	X	X	••
2.500mm	KPRF	X	25	•	X	X	X	••
3.000mm	KPRF	X	30	•	X	X	X	••

### CUSTOMIZE OPTIONS

#### LED CONTROL




	<b>N</b>	No Dimmable	KPRF	X	••	<b>N</b>	X	X	•	••
	<b>D</b>	Dimmable Dali	KPRF	X	••	<b>D</b>	X	X	•	••
	<b>K</b>	Casambi	KPRF	X	••	<b>K</b>	X	X	•	••
	<b>B</b>	Bluetooth	KPRF	X	••	<b>B</b>	X	X	•	••

#### COLOURS


	<b>WS</b>	Satin White	KPRF	X	••	<b>N</b>	X	X	•	<b>WS</b>
	<b>BS</b>	Satin Black	KPRF	X	••	<b>N</b>	X	X	•	<b>BS</b>

### TEC.DRAWINGS


#### PENDANT VERSION

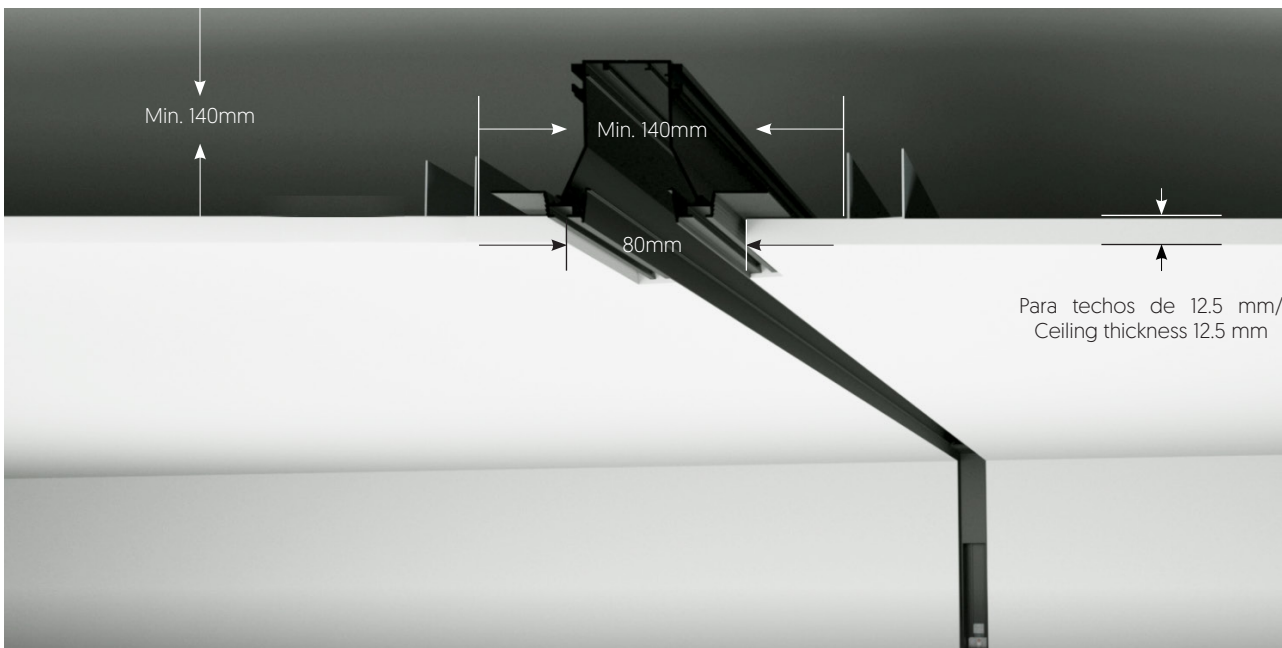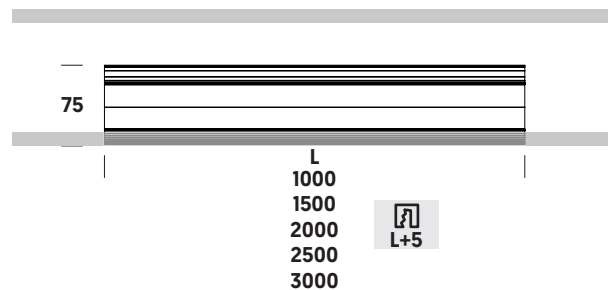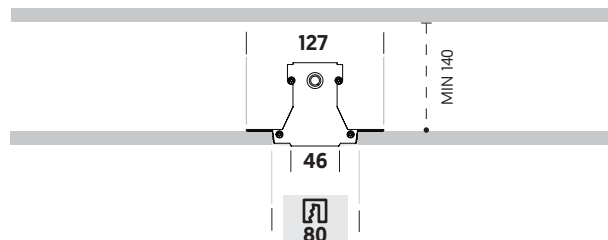

**COMPLEMENTS CODES**  
PENDANT VERSION



**End Cap**  
Black CCLICK21NE000  
White CCLICK21BL000




**Kit Electrical Union**  
No-Dim CCLICK22RW000  
Dim CCLICK23RW000



INDIVIDUAL VERSION




CONTINUOUS VERSION

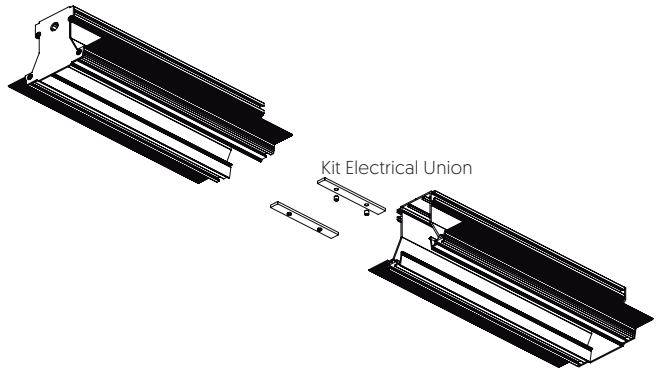


**⚠ IMPORTANTE:** Una alimentación para máximo 35 Luminarias.  
**ATTENTION:** Maximum 35 Luminaires per one Electrical Suspension.

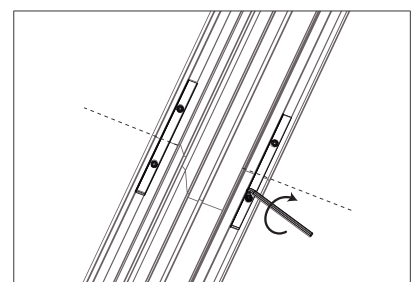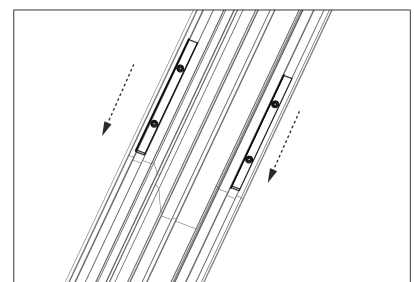




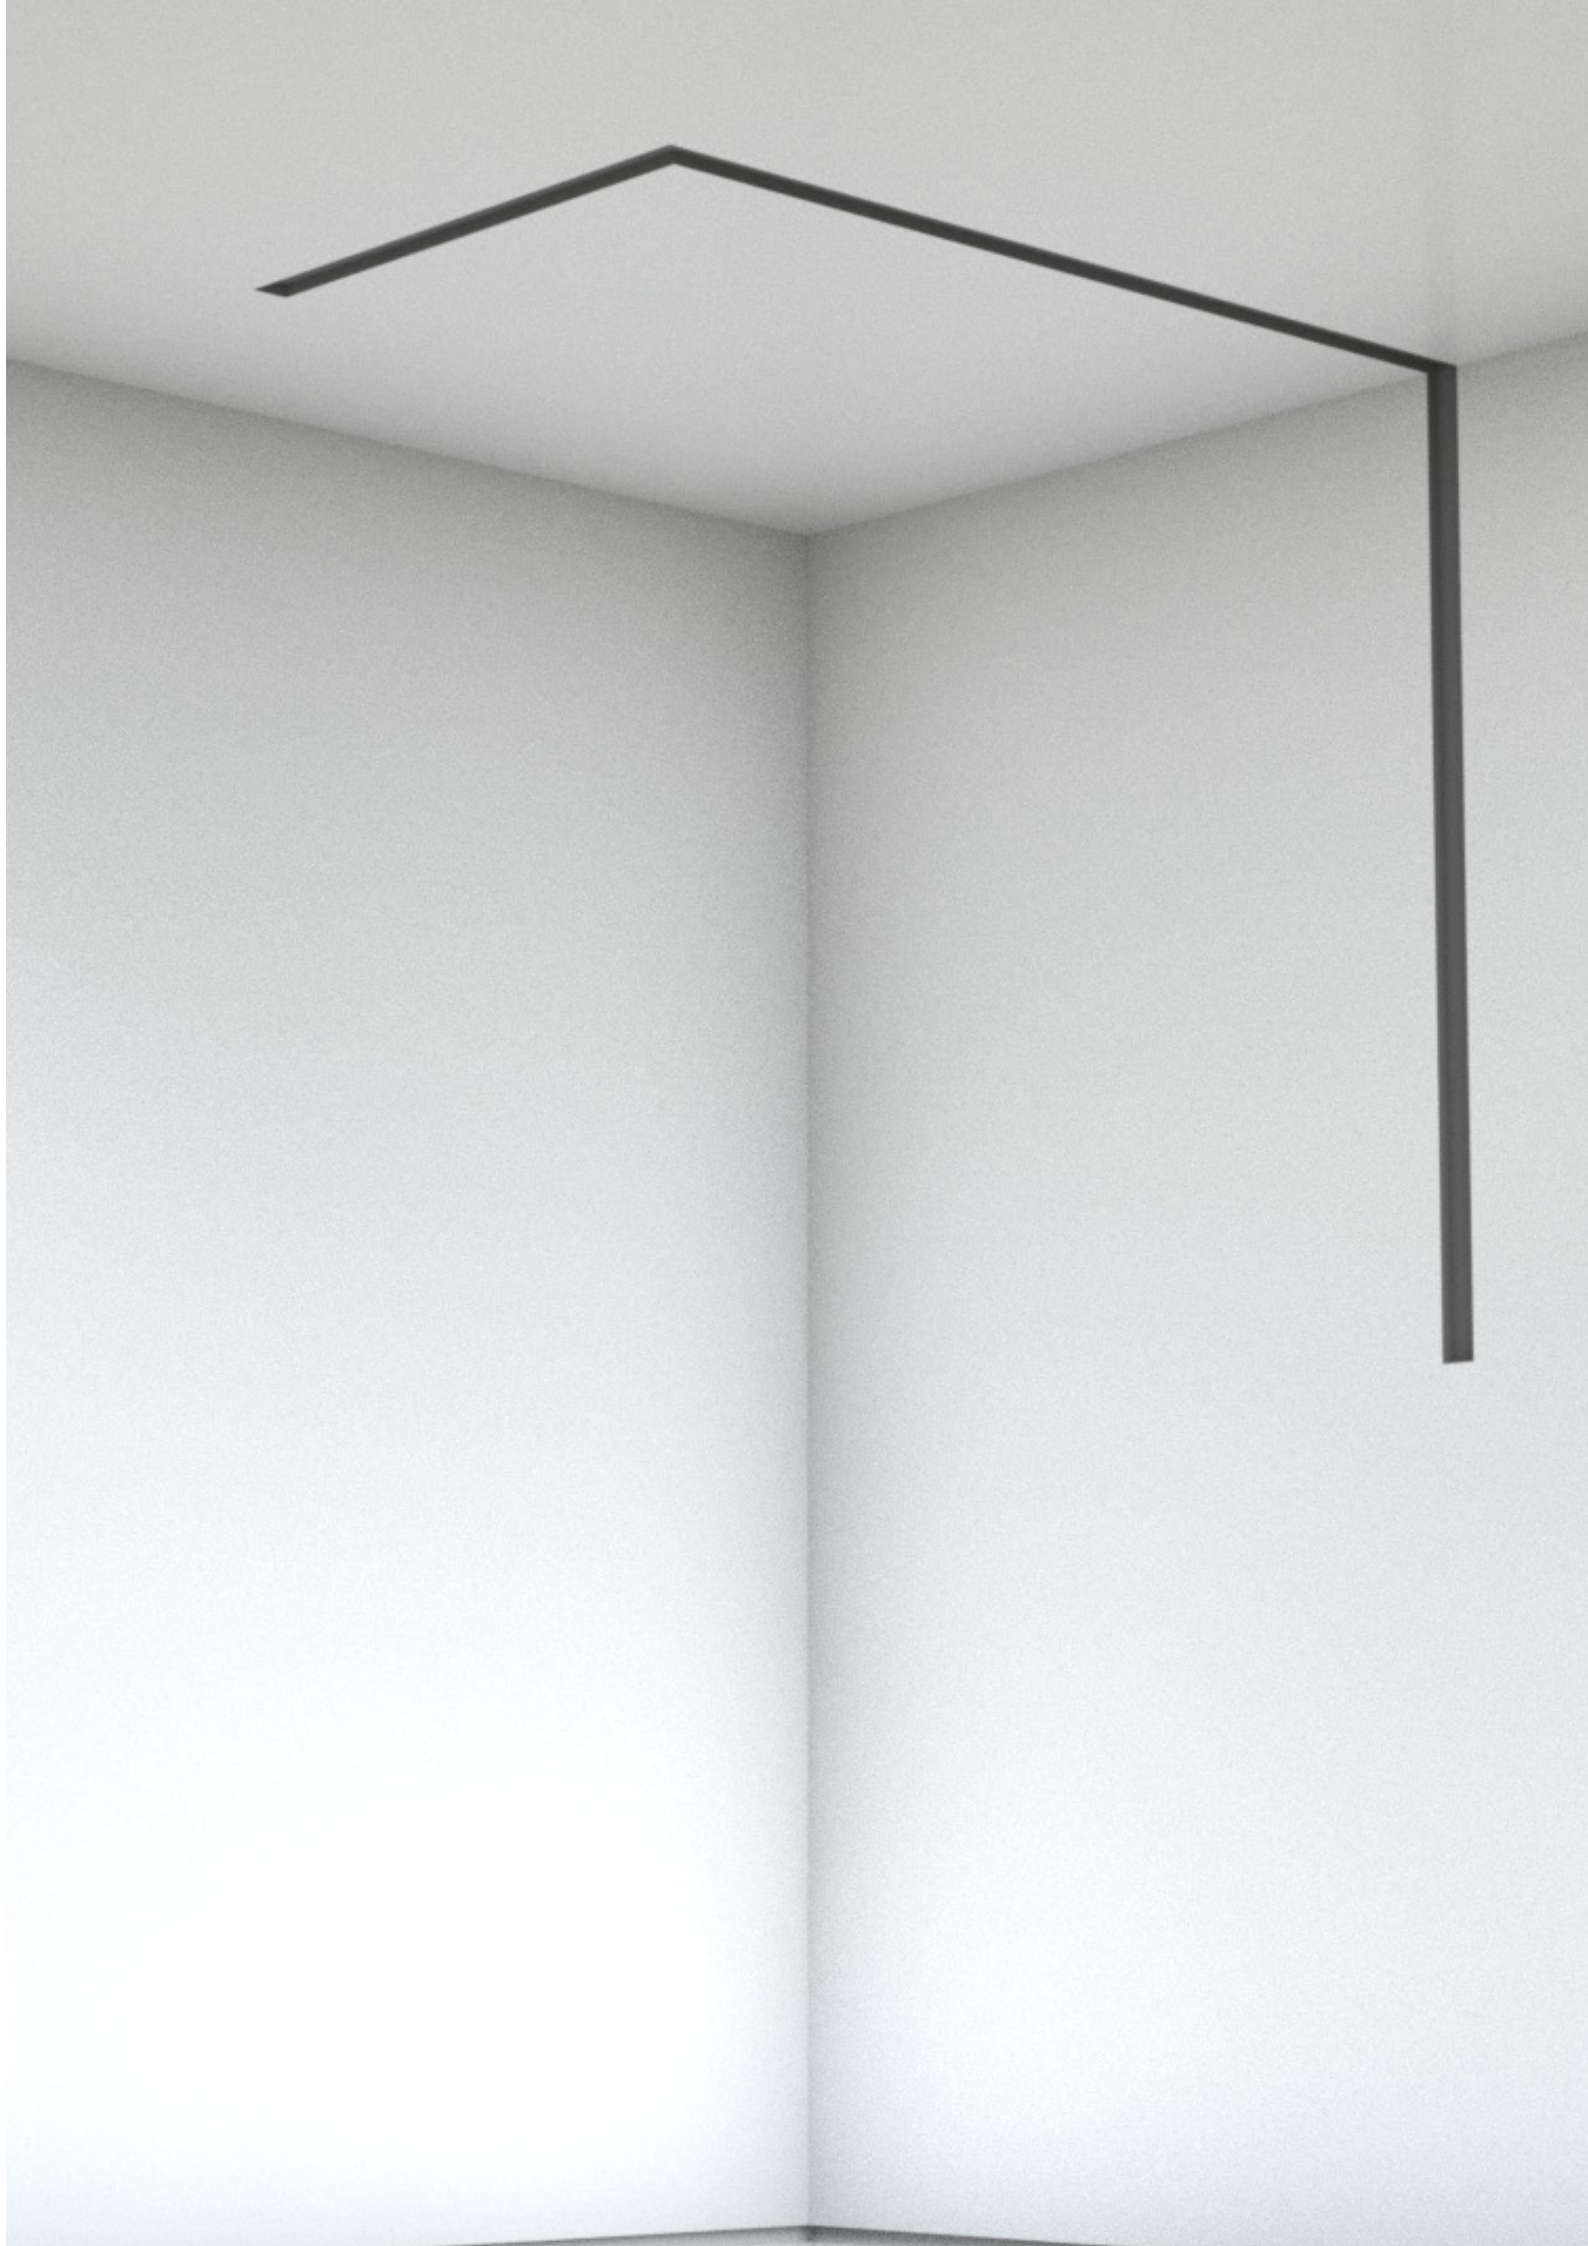


## ACCESSORIES

Disponible para las tres versiones colgante, superficie y frameless.  
Available in pendant, surface and frameless version.

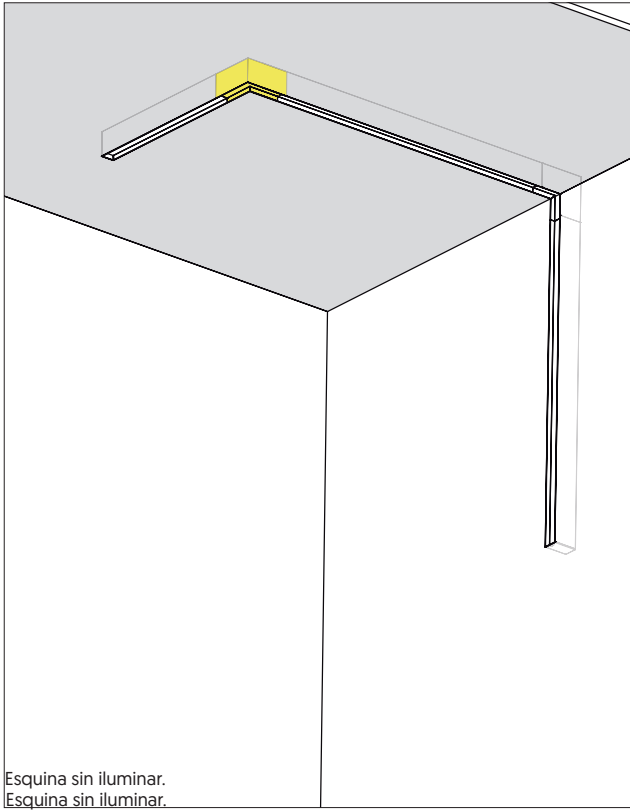

### CLICK CORNER CEILING

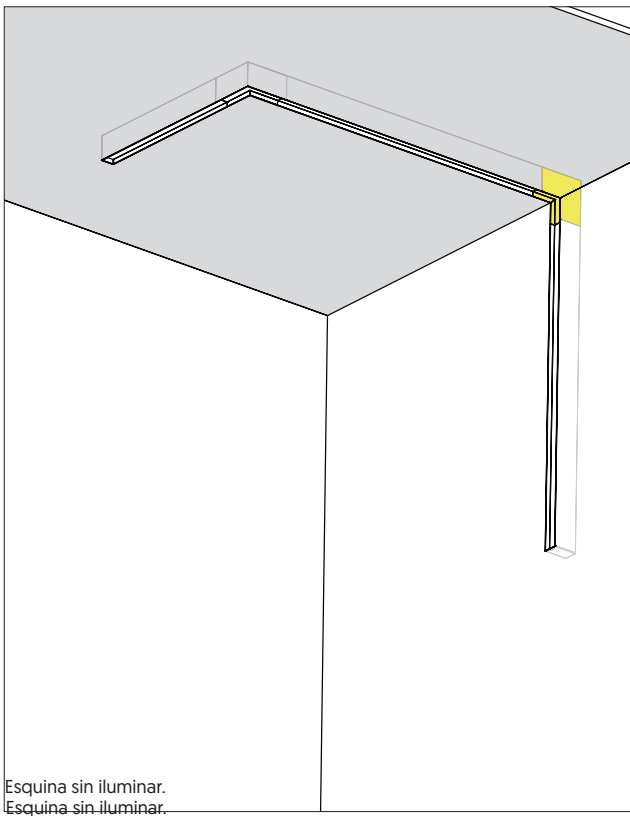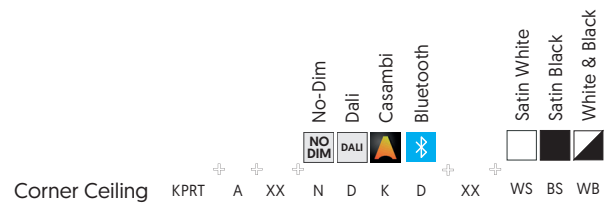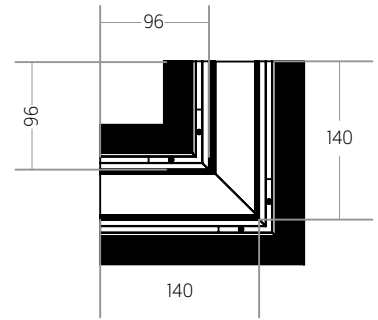

### CLICK CORNER CEILING-WALL

