

# CLICK PROFILE R

## LINEAR SYSTEMS




Perfil rehundido de extrusión de aluminio, en acabado texturizado en blanco y negro, versión para no-dim y dimmable. Instalación colgante, frameless y superficie.


Aluminum extruded recessed profile, in black and white textured finish, version for non-dim and dimmable. Pendant, frameless and surface version.

### TEC.DRAWINGS



#### PENDANT VERSION

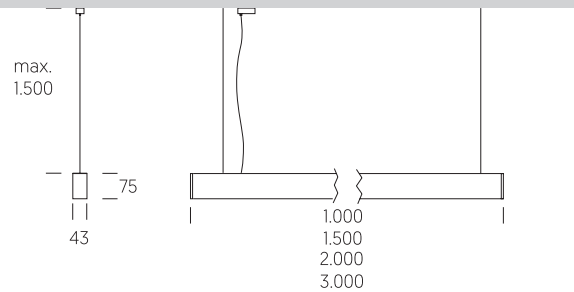

#### SURFACE VERSION

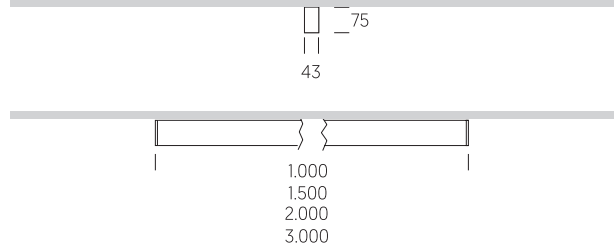

#### FRAMELESS VERSION

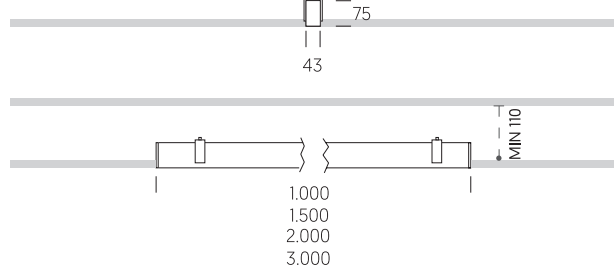

Para techos de 12.5 mm/ Ceiling thickness 12.5 mm

## INSTALLATION PHOTOS



Colgante-Pendant



Surface-Superficie



Frameless

LED		230V	IP20
-----	--	------	------

1.000mm	KPRX	X	10	•	X	X	X	•	•
1.500mm	KPRX	X	15	•	X	X	X	•	•
2.000mm	KPRX	X	20	•	X	X	X	•	•
2.500mm	KPRX	X	25	•	X	X	X	•	•
3.000mm	KPRX	X	30	•	X	X	X	•	•

## CUSTOMIZE OPTIONS

### LED CONTROL


	<b>N</b>	No Dimmable	KPRX	X	•	•	<b>N</b>	X	X	•	•
	<b>D</b>	Dimmable Dali	KPRX	X	•	•	<b>D</b>	X	X	•	•
	<b>K</b>	Casambi	KPRX	X	•	•	<b>K</b>	X	X	•	•
	<b>D</b>	Bluetooth	KPRX	X	•	•	<b>D</b>	X	X	•	•

### COLOURS


	<b>WS</b>	Satin White	KPRX	X	•	•	<b>N</b>	X	X	•	<b>WS</b>
	<b>BS</b>	Satin Black	KPRX	X	•	•	<b>N</b>	X	X	•	<b>BS</b>

## COMPLEMENTS CODES


### PENDANT VERSION




**Electrical Susp. NO-DIM**  
White CCLICK20BLN00  
Black CCLICK20NEN00



**Electrical Susp. DIM**  
White CCLICK20BL000  
Black CCLICK20NE000




**Kit Suspension**  
White CCLICK19BL000  
Black CCLICK19NE000




**Kit Electrical Union**  
No-Dim CCLICK17RW000  
Dim CCLICK18RW000

### INDIVIDUAL VERSION

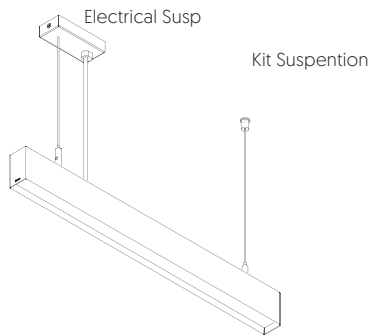

### CONTINUOUS VERSION

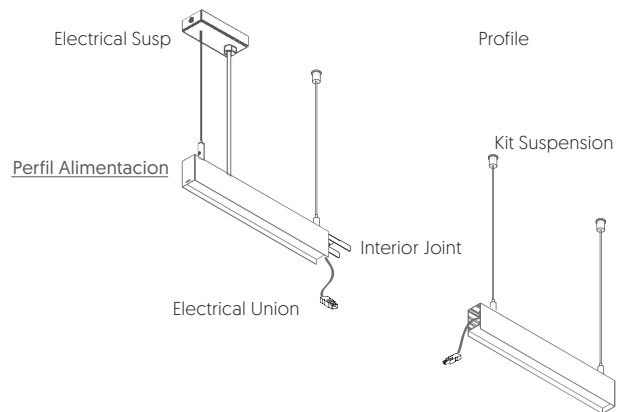


**IMPORTANTE:** Una alimentación para máximo 35 Luminarias.  
**ATTENTION:** Maximum 35 Luminaires per one Electrical Suspension.

### GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE

#### Perfil con alimentación / Profile with Electrical Suspension

Ref.	Length	Elec. Susp.	Kit Susp.	X	Y
Profile R10	1000 mm	1	1	900	50
Profile R15	1500 mm	1	1	1400	50
Profile R20	2000 mm	1	1	1900	50
Profile R25	2500 mm	1	1	2400V	50
Profile R30	3000 mm	1	1	2900	50


Especial para individuales o iniciales para continuos / Special for individuals or initials for continuous

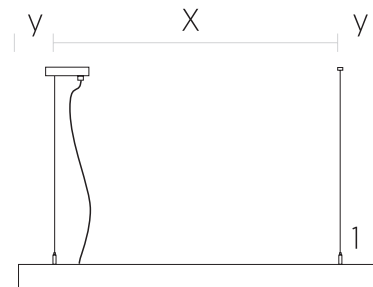


#### Perfil sin alimentación / Profile with out Electrical Suspension

Ref.	Length	Kit Susp.	Elec. Union	X	Y
Profile R10	1000 mm	2	1	900	50
Profile R15	1500 mm	2	1	1400	50
Profile R20	2000 mm	2	1	1900	50
Profile R25	2500 mm	2	1	2400	50
Profile R30	3000 mm	2	1	2900	50


Especial para líneas continuas / Special for continuous lines.

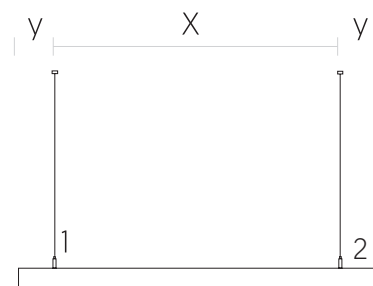

**COMPLEMENTS CODES**  
FRAMELESS VERSION




**Interior Joint**  
No-Dim CCLICK17RW000  
Dim CCLICK18RW000




**Ceiling Bracket Line R**  
CCLICK15RW000

**INDIVIDUAL VERSION**

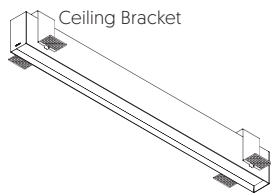

Ceiling Bracket

**CONTINUOUS VERSION**

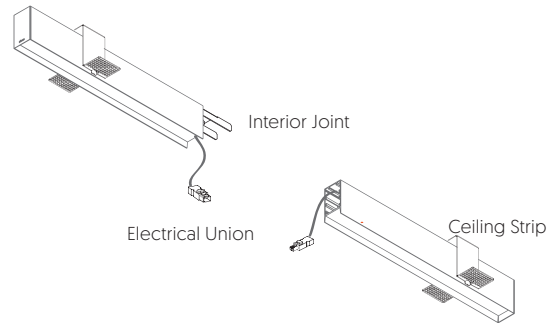


Interior Joint

Electrical Union

Ceiling Strip


**GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE**

Ref.	Lenght		Ceiling strip
Profile R10	1000 mm	1010x47	2
Profile R10	1500 mm	1510x47	2
Profile R10	2000 mm	2010x47	3
Profile R10	2500 mm	2510x47	4
Profile R10	3000 mm	3010x47	4




**IMPORTANTE:** Una alimentación para máximo 35 Luminarias.  
**ATTENTION:** Maximium 35 Luminaires per one Electrical Suspension.

**COMPLEMENTS CODES**  
SURFACE VERSION

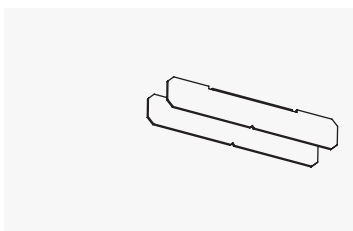


Interior Joint

**INDIVIDUAL VERSION**



**CONTINUOUS VERSION**

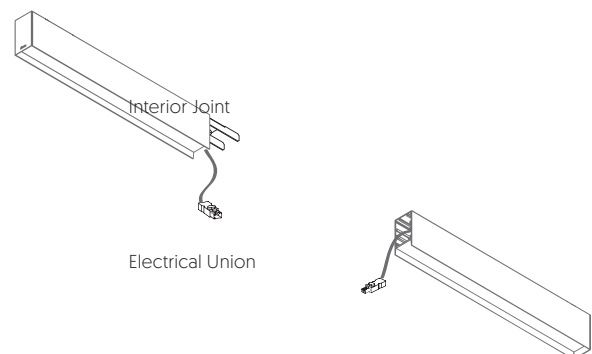

Interior Joint

Electrical Union