


LINE R TRACK

PROFILES



	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>85
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>85
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>85
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>85
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>85
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>85
				4.000K	9.997	

TEC.DRAWINGS

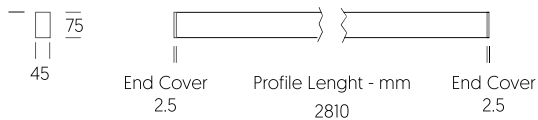

Luminarias compatibles con los siguientes carriles: / The luminaires are compatible with the following rails:
 NA Globaltrac PRO, Concord, Eutrack 25101, Hoffmeister, IG STD 677, Ivela, Stucchi and Unipro T3.

DETAIL PHOTO



LED ⊕ 230V IP20 ⌚ 60,000h L80 McAdam C3
 ≈ 80W > 12.000lm **LNRT A 28** • • **9** • •

BASIC OPTIONS

NO DIM	N	No Dimmable					
3K	3	3000K					
9	9	120°					
A	A	Ice Difusser					
WS	WS	Satin White	LNRT	A	••	N 3 9	A WS
BS	BS	Satin Black	LNRT	A	••	N 3 9	A BS

CUSTOMIZE OPTIONS

LED CONTROL							
DALI	D	Dimmable Dali	LNRT	A	••	D	• 9 • •
LED COLOR TEMPERATURE							
4K	4	4000K	LNRT	A	••	• 4	9 • •