


# ROUND RECESSEDS



	W	mA	TEMP	LUM	CRI
ROUND	24	600	3.000K	1920	>80
	24	600	4.000K	2016	>80



## TEC.DRAWINGS

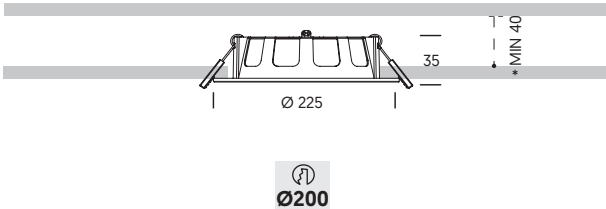

\* Empotrable ultra delgado solo se requiere de una profundidad de techo de 40mm / Ultra-thin LED recessed down light. Only requires 40 mm clearance of ceiling space.

LED
□
230V
IP40 EXT
IP20 INT
⌚ 50.000h L90/B10

≈ 24W > 1900lm **ROUND A 24** . . . . .

## BASIC OPTIONS

<b>NO DIM</b>	<b>N</b>	No Dimmable							
<b>3K</b>	<b>3</b>	3000K	ROUN	A	..	.	<b>3</b>	.	..
<b>4K</b>	<b>4</b>	4000K	ROUN	A	..	.	<b>4</b>	.	..
<b>9</b>	<b>9</b>	>100°							
<b>A</b>	<b>A</b>	Ice Difusser							
<b>WS</b>	<b>WS</b>	Satin White	ROUN	A	<b>24</b>	<b>N</b>	<b>3</b>	<b>9</b>	<b>A WS</b>

Wifi or Bluetooth version and other colors, please consult it.