



# TUBE 55 PENDANT TRACK

## SURFACE & PENDANTS



	W	mA	TEMP	LUM	CRI
	12,2	300	2.700K	1.165	>95
<b>TUBE 55</b>	12,2	300	3.000K	1.245	>95
	12,2	300	4.000K	1.380	>95

<b>GU 10</b>	<b>LED</b>	<b>MAX 10W</b>		<b>230V</b>
Max. 10W				
	<b>TPT5</b>	<b>E</b>	<b>10</b>	<b>X X X X X</b>
	<b>TPT5</b>	<b>E</b>	<b>10</b>	<b>X X X X X</b>
				<b>WS BS</b>

<b>LED</b>		<b>230V</b>	<b>IP20</b>
≈ 12W > 1.300lm			
	<b>TPT5</b>	<b>A</b>	<b>55 N . 4 . . .</b>

### BASIC OPTIONS

<b>NO DIM</b>	<b>N</b>	No Dimmable							
<b>3K</b>	<b>3</b>	3000K							
	<b>3</b>	34°							
	<b>B</b>	Clear Difusser							
	<b>WB</b>	Satin White + Black	<b>TPT5</b>	<b>A</b>	<b>55 N</b>	<b>3</b>	<b>3</b>	<b>B</b>	<b>WS BS</b>
	<b>BS</b>	Satin Black	<b>TPT5</b>	<b>A</b>	<b>55 N</b>	<b>3</b>	<b>3</b>	<b>B</b>	<b>WS BS</b>

### CUSTOMIZE OPTIONS

<b>LED COLOR TEMPERATURE</b>									
<b>2.7K</b>	<b>2</b>	2700K	<b>TPT5</b>	<b>A</b>	<b>55 . 2 . . . .</b>				
<b>4K</b>	<b>4</b>	4000K	<b>TPT5</b>	<b>A</b>	<b>55 . 4 . . . .</b>				


<b>LED BEAM ANGLE</b>									
	<b>1</b>	16°	<b>TPT5</b>	<b>A</b>	<b>55 . . 1 . . .</b>				

<b>LED COMPLEMENTS</b>									
	<b>P</b>	Cross	<b>TPT5</b>	<b>A</b>	<b>55 . . . . P . .</b>				


<b>COLOURS</b>									
	<b>PB</b>	Polished & Black	<b>TPT5</b>	<b>A</b>	<b>55 . . . . PB</b>				
	<b>CB</b>	Copper & Black	<b>TPT5</b>	<b>A</b>	<b>55 . . . . CB</b>				

\*Consultar disponibilidad / Check aviality

### TEC.DRAWINGS

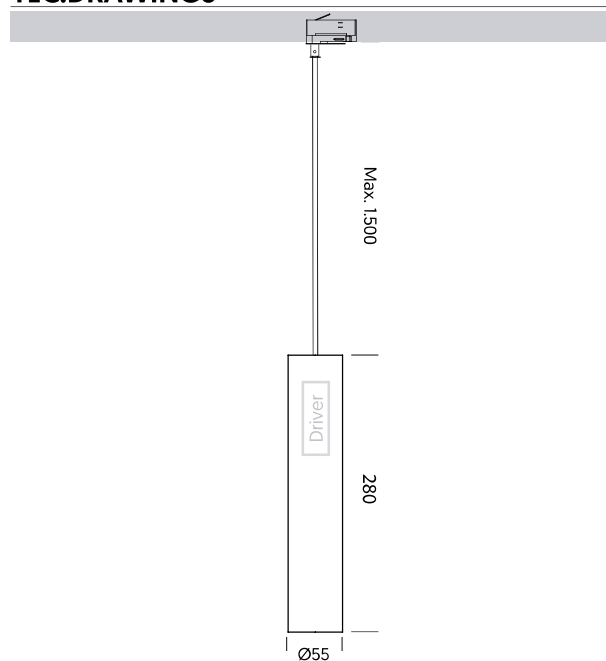

### COMPLEMENTS

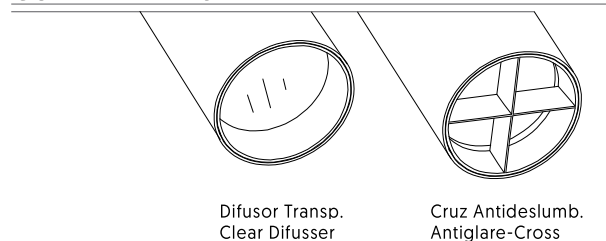

\*Consultar disponibilidad / Check aviality