


# TUBE 80 SURFACE


## SURFACE & PENDANTS




	W	mA	TEMP	LUM	CRI
	17.3	500	2.700K	2.437	>82
<b>TUBE 80</b>	17.3	500	3.000K	2.625	>85
	17.3	500	4.000K	2.680	>85

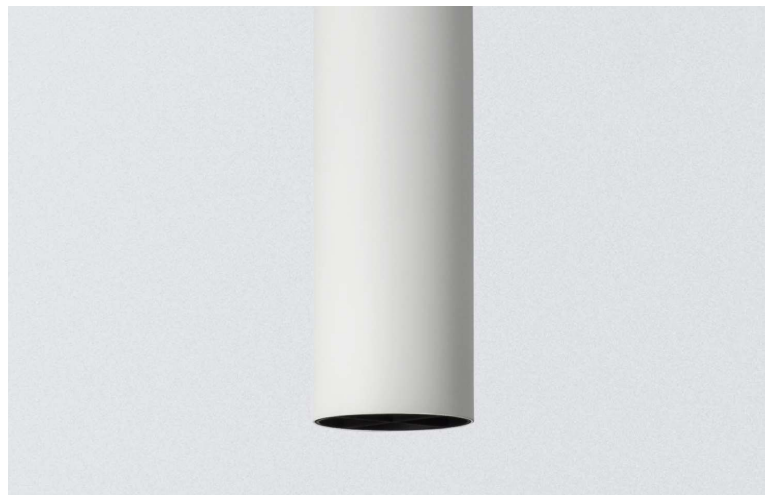

### TEC.DRAWINGS

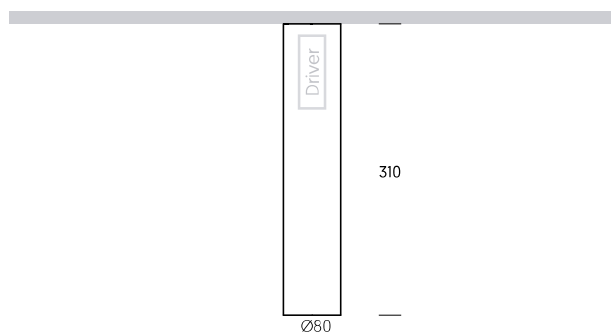

### COMPLEMENTS

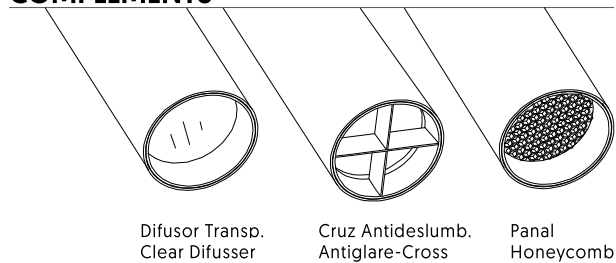

LED □ 230V IP20

≈18W > 2.500lm **TBS8 A 80** . . . . .

### BASIC OPTIONS

<b>NO DIM</b>	<b>N</b>	No Dimmable					
<b>3K</b>	<b>3</b>	3000K					
<b>3</b>	<b>3</b>	32°					
<b>B</b>	<b>B</b>	Clear Difusser					
<b>WB</b>	<b>WB</b>	Satin White	TBS8	A	<b>80</b>	<b>N</b>	<b>3</b> <b>3</b> <b>B</b> <b>WB</b>
<b>BS</b>	<b>BS</b>	Satin Black	TBS8	A	<b>80</b>	<b>N</b>	<b>3</b> <b>3</b> <b>B</b> <b>BS</b>

### CUSTOMIZE OPTIONS

<b>LED CONTROL</b>							
<b>DALI</b>	<b>D</b>	Dimmable Dali	TBS8	A	<b>80</b>	<b>D</b>	. . . . .
<b>LED COLOR TEMPERATURE</b>							
<b>2.7K</b>	<b>2</b>	2700K	TBS8	A	<b>80</b>	. <b>2</b> . . . . .	
<b>4K</b>	<b>4</b>	4000K	TBS8	A	<b>80</b>	. <b>4</b> . . . . .	
<b>LED BEAM ANGLE</b>							
<b>2</b>	<b>2</b>	25°	TBS8	A	<b>80</b>	. . . <b>2</b> . . . . .	
<b>6</b>	<b>6</b>	60°	TBS8	A	<b>80</b>	. . . <b>6</b> . . . . .	
<b>LED COMPLEMENTS</b>							
<b>P</b>	<b>P</b>	Cross	TBS8	A	<b>80</b>	. . . . . <b>P</b> . . . . .	
<b>H</b>	<b>H</b>	Honeycomb	TBS8	A	<b>80</b>	. . . . . <b>H</b> . . . . .	
<b>COLOURS</b>							
<b>PB</b>	<b>PB</b>	Polished & Black	TBS8	A	<b>80</b>	. . . . . <b>PB</b>	
<b>CB</b>	<b>CB</b>	Copper & Black	TBS8	A	<b>80</b>	. . . . . <b>CB</b>	