


TUBE TRACK

SURFACE & PENDANTS




	W	mA	TEMP	LUM	CRI
TUBE 55	12.2	350	2.700K	1.165	>95
	12.2	350	3.000K	1.245	>95
	12.2	350	4.000K	1.380	>95
TUBE 80	21.1	600	2.700K	2.925	>82
	21.1	600	3.000K	3.150	>85
	21.1	600	4.000K	3.255	>85

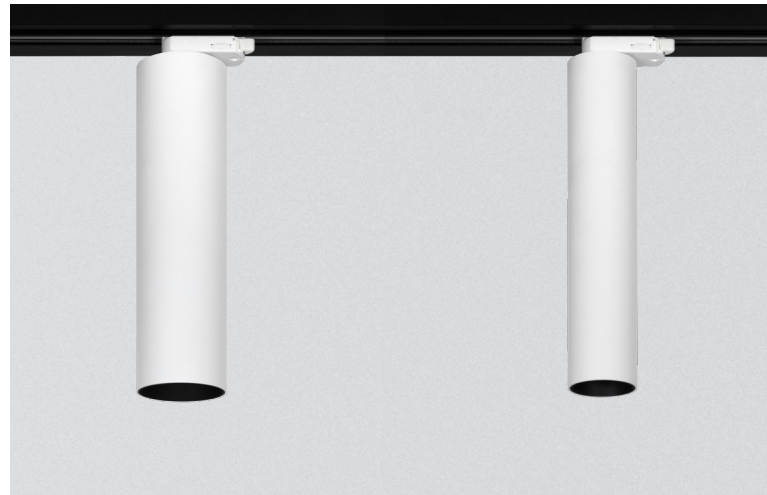


TEC.DRAWINGS


TUBE TRACK 55

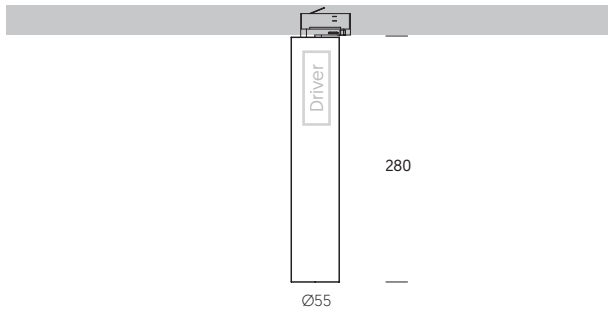

TUBE TRACK 80

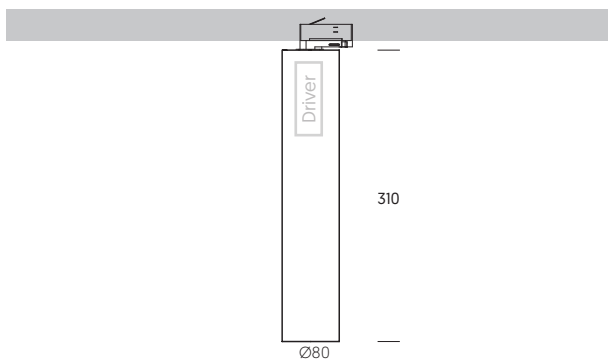

COMPLEMENTS

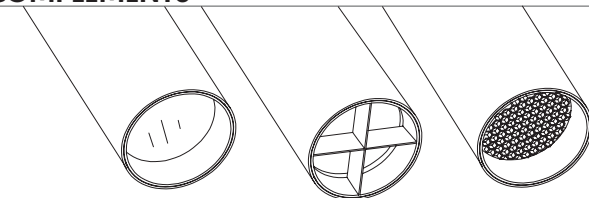

Difusor Transp.
Clear Difusser

Cruz Antideslumb.
Antiglare-Cross

Panal
Honeycomb

LED □ 230V IP20

Tube Track 55 ≈12W > 1.300lm **TBT5 A 55 N**
 Tube Track 80 ≈21W > 2.900lm **TBT8 A 80 N**

BASIC OPTIONS

	N No Dimmable								
	3 3000K								
	3 32°								
	B Clear Difusser								
	WB Satin White	TBT5	A	55	N	3	3	B	WB
		TBT8	A	80	N	3	3	B	BS
	BS Satin Black	TBT5	A	55	N	3	3	B	WB
		TBT8	A	80	N	3	3	B	BS

CUSTOMIZE OPTIONS

LED COLOR TEMPERATURE									
	2 2700K	TBT	A	2	.	..
	4 4000K	TBS	A	4	.	..
LED BEAM ANGLE									
	1 15°	TBT5	A	55	.	.	.	1	..
	2 25°	TBT8	A	80	.	.	.	2	..
LED COMPLEMENTS									
	P Cross	TBT	A	P ..
	H Honeycomb for Ø80	TBT8	A	80	H ..
COLOURS									
	PB Polished & Black	TBS	A	PB
	CB Copper & Black	TBS	A	CB