


LINE E PROFILES

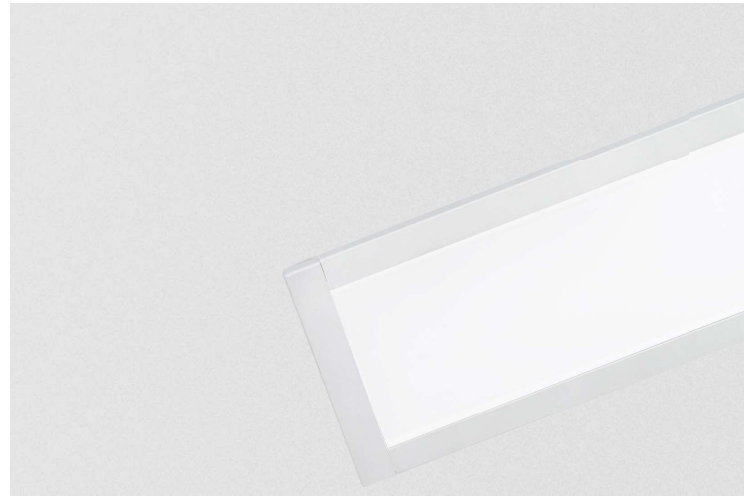



	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>85
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>85
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>85
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>85
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>85
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>85
				4.000K	9.997	

LED	⊕	230V	IP43 EXT	IP20 INT	Ⓛ 60.000h L80	McAdam C3								
							≈ 14W	> 2.000lm	LNXE A 07	•	•	9	•	••
							≈ 22W	> 3.000lm	LNXE A 11	•	•	9	•	••
							≈ 28W	> 4.000lm	LNXE A 14	•	•	9	•	••
							≈ 36W	> 6.000lm	LNXE A 18	•	•	9	•	••
							≈ 45W	> 7.000lm	LNXE A 22	•	•	9	•	••
							≈ 56W	> 9.000lm	LNXE A 28	•	•	9	•	••

BASIC OPTIONS

NO DIM	N	No Dimmable												
3K	3	3000K												
9	9	120°												
A	A	Ice Difusser												
WS	WS	Satin White	LNXE	A	••	N	3	9	A	WS				
BS	BS	Satin Black	LNXE	A	••	N	3	9	A	BS				

TEC.DRAWINGS

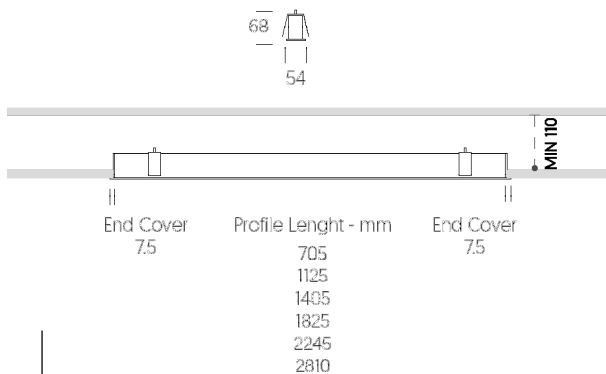

Espesor minimo de techo 7mm y maximo 20mm / Minimum roof thickness 7mm and maximum 20mm.

CUSTOMIZE OPTIONS


LED CONTROL

PUSH	F	Dimmable Push	LNXE	A	••	F	•	9	•	••
DALI	D	Dimmable Dali	LNXE	A	••	D	•	9	•	••


LED COLOR TEMPERATURE

4K	4	4000K	LNXE	A	••	•	4	9	•	••
-----------	----------	-------	------	---	----	---	----------	----------	---	----


COMPLEMENTS CODES



Interior Joint NO-DIM
1.5Meters LNEUXNXXELUN1
2.0Meters LNEUXNXXELUN2




Interior Joint DIM
1.5Meters LNEUXDXXELUD1
2.0Meters



Ceiling Bracket Line E
LNEEXXXRCKIT


SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28

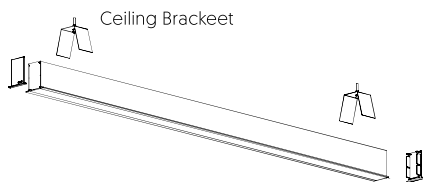

CONTINUOUS VERSION

Line 32 - 37 - 42- 46 - 50 -56

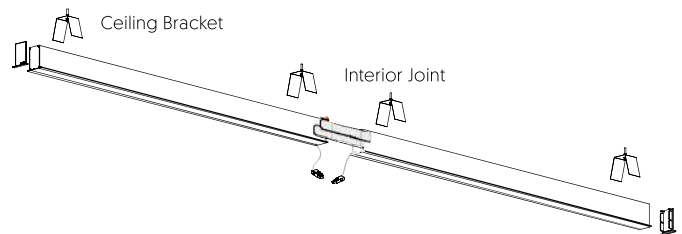

GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE

Ref.		Lenght		Ceiling strip	Ele. Union	
Line 07	{07}	705 mm		715x42	2	-
Line 11	{11}	1.125 mm		1.135x42	2	-
Line 14	{14}	1.405mm		1.415x42	2	-
Line 18	{18}	1.825 mm		1.835x42	2	-
Line 22	{22}	2.245 mm		2.255x42	3	-
Line 28	{28}	2.810 mm		2.820x42	3	-
Line 32	{14+18}	3.230 mm		3.240x42	4	1.5m
Line 37	{18+18}	3.650 mm		3.660x42	4	2m
Line 42	{28+14}	4.215 mm		4.225x42	5	1.5m
Line 46	{28+18}	4.635 mm		4.645x42	6	1.5m
Line 50	{28+22}	5.055 mm		5.065x42	6	1.5m
Line 56	{28+28}	5.620 mm		5.630x42	6	1.5m

Para medidas mas largas de 5562 mm o mas de 2 perfiles consultar. / For longer measurements of 5562 mm or more than 2 profiles, please consult it.

IMPORTANTE: Una alimentación para máximo 10 metros. / **ATTENTION:** Maximum 10 meters per one power supply.